

Product information

Quali industries (Belgium)

Technical Customer Service



HYDRAULUB ISO 46

Description : A high performance hydraulic oil containing additives giving an optimal protection against wear, rust and corrosion.

Application : Universal hydraulic fluids, fulfilling the requirements of the majority of the manufacturers of hydraulic systems for mobile or stationary equipment. Can also be used, in certain cases, for screw compressors, mechanical gear-boxes functioning under moderate working conditions.

Specifications :

- DIN 51524 Part 2 HLP


Properties :

- Excellent protection against wear.
- Excellent lubricating film withstanding high operating pressures.
- High thermic stability.
- Good resistance against oxidation.
- Good separation of water.
- Anti-foam.

Typical analyses:

Density at 15°C	0,875	Color	L 2.5
Viscosity at 100°C	6,8 cSt	Viscosity at 40°C	46 cSt
Viscosity index	Min. 95	Flash point	210°C
T.A.N.. mg KOH/g	1,0	Pour point	-20 °C

These values are given as an indication, it acts of average values.

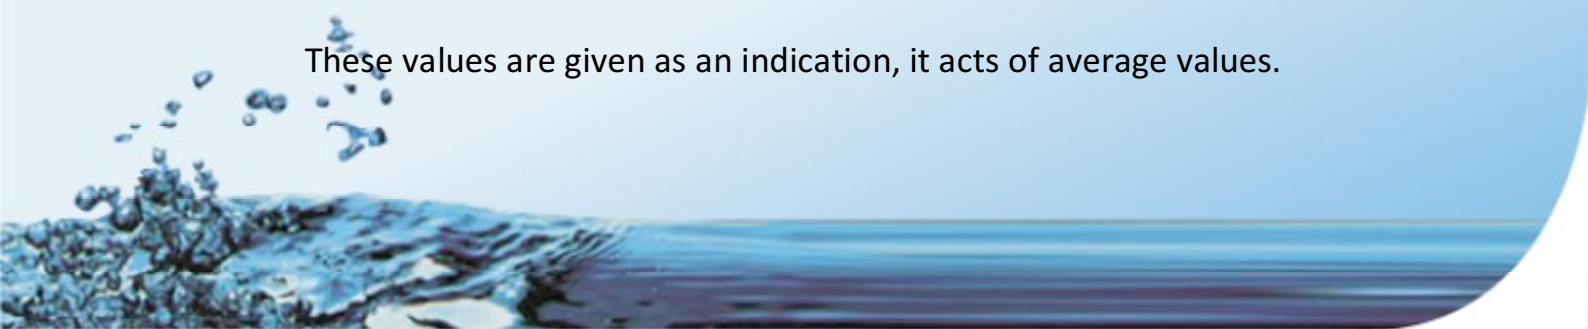

Product information

Quali industries (Belgium)

Technical Customer Service



Lubricants

